

ALS-3206

Rackmount Network Security Platform with Six Gigabit Ethernet Ports




The ALS-3206 is a powerful rackmount Internet security platform specifically designed for Internet secure connectivity. Equipped with the Intel® Core™ 2 Duo processor, it provides high performance and meets the requirements of Internet security appliances. The system supports CompactFlash® for OS and Internet security applications. In addition, the ALS-3206 can support system memory up to 4 GB DDR II 667 MHz. The ALS-3206 offers six 10/100/1000 Mbps LAN ports on the front panel. For easy access, there is one RS-232 serial port (DB-9 connector) on board for local system management, maintenance and diagnostics. The ALS-3206 provides four SATA II HDD interfaces. This product is FCC and CE compliant.

Features

- Internet security platform for ROBO and SMB
- Intel® Core™ 2 Duo T7400 2.16 GHz Processor with 4 MB L2 cache
- Intel® Celeron® M 440 1.86 GHz Processor with 1 MB L2 cache
- Bypass capability during system power-off or software halt
- Software programmable bypass control
- Programmable watchdog timer
- Up to 4 GB DDR II 667 SDRAM
- Two PCI-X™ extension slots via riser card

Dimensions

Units: mm

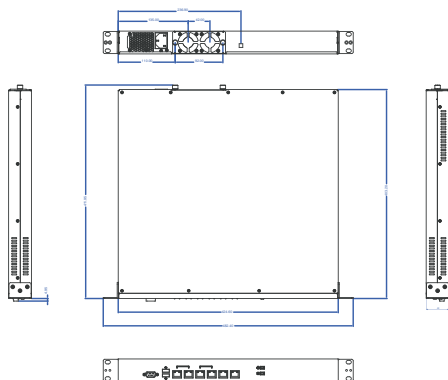

Specifications

Processor System	CPU	Intel® Core™ 2 Duo T7400	Intel® Celeron® M 440
	Clock Speed	2.16 GHz	1.86 GHz
	FSB	667 MHz	533 MHz
	L2 Cache	4 MB	1 MB
	Chipset	Intel® 945GME + ICH7R	
Memory	BIOS	Phoenix® Award 4 Mb Flash	
	Technology	DDR II 533/667 MHz SDRAM	
	Max. Capacity	4 GB	
Ethernet	Socket	Two 240-pin DIMM	
	Interface	10/100/1000 Base-TX	
	Controller	Six Intel® 82573L	
	Connector	Six RJ-45	
LAN Bypass	LAN port	1st & 2nd, 3rd & 4th ports	
Drive Bay	3.5" SATA HDD	One	
Cooling	Fan	Two (10 CFM/each)	
Management	Console	One RS-232	
Miscellaneous	Power Switch	One	
	CompactFlash® Socket	One (Secondary IDE)	
	VGA	One DB-15	
	USB	Two Type-A	
Extension	PCI™ Slot	One	
	PCI-X™ Slot	Two (on riser card)	
Power Requirement	Input	AC 100-240 V at 50-60 Hz, full range	
	Output	250 W ATX	
Environment	Operating	Temperature	Non-Operating
		0°C - 40°C (32°F - 104°F)	-20°C - 75°C (-4°F - 167 °F)
		Humidity	5% - 85% at 40°C (104°F)
Physical	Dimensions	424.6 x 44 x 412 mm (W x H x D)	
	Weight	8.5 kg	

Ordering Information

Part Number	Processor	LAN	AC Adapter	DDRRAM	HDD Driver
ALS-3206/T7400/1 GB	Core™ 2 Duo T7400 (2.16 G)	Six Gigabit (with bypass)	250 W	1 GB	160 GB
ALS-3206/CM440/1 GB	C-M440 1.86 GHz	Six Gigabit (with bypass)	250 W	1 GB	160 GB