


# PXI-7901

## 16-CH General-Purpose SPDT Relay Module

### Features

- PXI specifications Rev. 2.2 compliant
- 3U Eurocard form factor, CompactPCI compliant (PICMG 2.0 R3.0)
- PICMG 2.1 R2.0 CompactPCI Hot Swap specifications compliant
- 16-CH SPDT (1 Form C) non-latching relays
- Switching capacity
  - 3 A switching, 3 A carrying
  - 220 V<sub>DC</sub>, 250 V<sub>AC</sub>
- 125 operations per second for full settling
- Onboard 1 k-sample scan list for deterministic scanning
- Handshaking signals for external instruments synchronization
- Design for safety-critical applications
  - Hardware emergency shutdown with programmable relay safety status
  - Watchdog timer from 1 ms to 420 s with programmable relay safety status
- 8 auxiliary 3.3 V/TTL digital inputs/outputs with 5 V tolerance
- Multiple modules synchronization through PXI trigger bus and star trigger
- Fully software programmable
- **Operating Systems**
  - Windows Vista/XP/2000/2003
- **Recommended Software**
  - VB/VC++/BCB/Delphi
  - DAQBench
- **Driver Support**
  - ADL-SWITCH for Windows

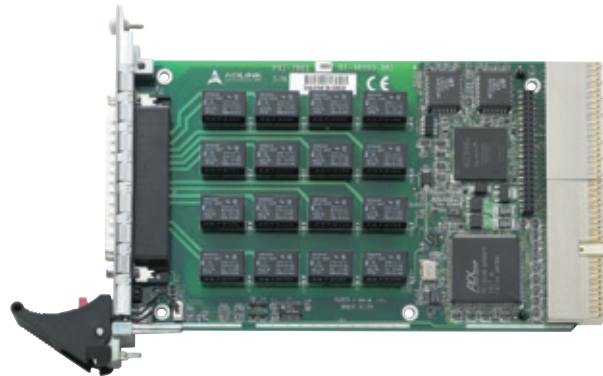

### Introduction

ADLINK PXI-7901 is a general-purpose (GP) switch module implementing 16-CH independent single-pole double-throw (SPDT) relays (1 Form C). PXI-7901 can connect one input to one output and be used as signal switching and routing for measurement system or ATE. Thanks to its high switching capacity, PXI-7901 can also be used to turn on or turn off devices such as motors, fans, heaters, and lights.

The contact position of the relays can be changed either by direct software commands or by following the instructions previously stored in the onboard scan list. The scan list advances upon the trigger from external measurement devices, such as a DMM. The scan list could also advance when the scan-delay timer expires. In the PXI-7901, PXI trigger functions are supported and software programmable. Multiple modules can therefore be synchronized without additional field wiring.

### Specifications

#### Relay Characteristics

- Number of channels: 16
- Relay type: SPDT (1 Form C), non-latching
- Switching capacity
  - Max. switching current: 3 A
  - Max. switching voltage: 220 V<sub>DC</sub>, 250 V<sub>AC</sub>
  - Max. switching power: 50 VA, 60 W
  - Max. carrying current: 3 A
- Failure rate\*: 10 μA @ 10 m V<sub>DC</sub>
- Contact resistance: 150 mΩ max.
- Relay set/reset time
  - Operate time: 5 ms max.
  - Release time: 5 ms max.
  - Bounce time: 3 ms max.
- Expected life
  - Mechanical life: 10<sup>8</sup> operations min.
  - Electrical life : 10<sup>5</sup> operations min. (0.4 A @ 125 V<sub>AC</sub>, resistive load)
- Data transfer: Programmed I/O

#### Auxiliary Digital I/O

- Numbers of channel: 8 inputs/outputs
- Compatibility: 3.3 V/TTL (5 V tolerant)

#### Handshaking Signals

- Programmable polarity
- Logic level: 3.3 V/TTL (5 V tolerant)
- TRG\_IN source: AUX1, PXI trigger bus, PXI star trigger input
- S\_ADV destination: AUX0, PXI trigger bus, PXI star trigger outputs (in the star trigger slot)

#### Safety Functions

- Emergency shutdown
  - Logic level: 3.3 V/TTL (5 V tolerant)
  - Active: logic low

- Watchdog timer
  - Base clock available: 10 MHz, fixed
  - Counter width: 32-bit

#### General Specifications

- I/O Connector: 62-pin D-sub male
- Operating temperature: 0 to 55°C
- Storage temperature: -20 to 70°C
- Relative humidity: 5 to 85% non-condensing
- Power requirements: (when all relays are ON)

Device	+5 V	+3.3 V
PXI-7901	700 mA	400 mA

- Dimensions (not including connectors)
  - 160 mm x 100 mm


#### Certificate

- EMC/EMI: CE, FCC Class A

### Termination Boards

#### ■ TB-6201-01

General-Purpose Switch Termination Board with one 62-Pin D-Sub Female Connector (Cables are not included. For information on mating cables, refer to Section 12.)



Termination board TB-6201-01

### Pin Assignment

#### CN1

		22. COM0	
43. NO0	23. COM1		1. NC0
44. NO1	24. COM2		2. NC1
45. NO2	25. COM3		3. NC2
46. NO3	26. COM4		4. NC3
47. NO4	27. COM5		5. NC4
48. NO5	28. COM6		6. NC5
49. NO6	29. COM7		7. NC6
50. NO7	30. COM8		8. NC7
51. NO8	31. COM9		9. NC8
52. NO9	32. COM10		10. NC9
53. NO10	33. COM11		11. NC10
54. NO11	34. COM12		12. NC11
55. NO12	35. COM13		13. NC12
56. NO13	36. COM14		14. NC13
57. NO14	37. COM15		15. NC14
58. NO15	38. N/C		16. NC15
59. N/C	39. N/C		17. N/C
60. AUX3	40. AUX4		18. AUX2/SHDNn
61. AUX6	41. +5Vout		19. AUX5
62. AUX7	42. AUX1/TRG IN		20. GND
			21. AUX0/S_ADV

### Ordering Information

- **PXI-7901**  
16-CH General-Purpose SPDT Relay Module

\* Failure rate indicates the lower limit of switching capacity of a relay contact at a reliability level of 60 %

- 1 Software Solutions
- 2 PXI/CompactPCI Platforms
- 3 Modular Instrument
- 4 PXI/CompactPCI Modules
- 5 Bus Interface
- 6 GPIB Interface
- 7 PCI/PCI Express<sup>®</sup> DAQ Cards
- 8 PCI/PCI Express<sup>®</sup> DIO Cards
- 9 PC/104-Plus Modules
- 10 ISA DAS/DIO Cards
- 11 System Product
- 12 Wiring Termination Boards
- 13 Motion, HSL, Vision, COM & GEME
- 14 Remote I/O Modules
- 15 Industrial Computers