

RK-110S

1U Rackmount Industrial Chassis for SBC



Features

- 1U height, 17.7 inch (450 mm) short depth
- One slim type FDD & one slim type CD-ROM drive bays
- One rear PCI™ expansion slot, integrated 200 W - 300 W power supply

Ordering Information

Model Name	Color	Backplane	Power Supply
NS-110SB-D3S2-250	Black	HPCI-D3S2	APS-9125XA-ST

Backplane Options


Model Name	PICMG® CPU	PCI™	ISA	PSU Connector
HPCI-D3S2	1	2	--	ATX

Power Supply Options

Model Number	Watt	Input Range	Output (Max.)					Current Type	
			+5 V	+3.3 V	+12 V	-12 V	-5 V		+5 Vsb
APS-9125XA-ST	250 W	90-264AC full Range	20 A	17 A	18 A	0.5 A	--	2 A	ATX12
APS-9130XU	300 W	90-264AC full Range	24 A	20 A	20 A	0.5 A	0.5 A	1.5 A	ATX12

Note: Contact us for more options such as DC input power supplies.

Dimensions

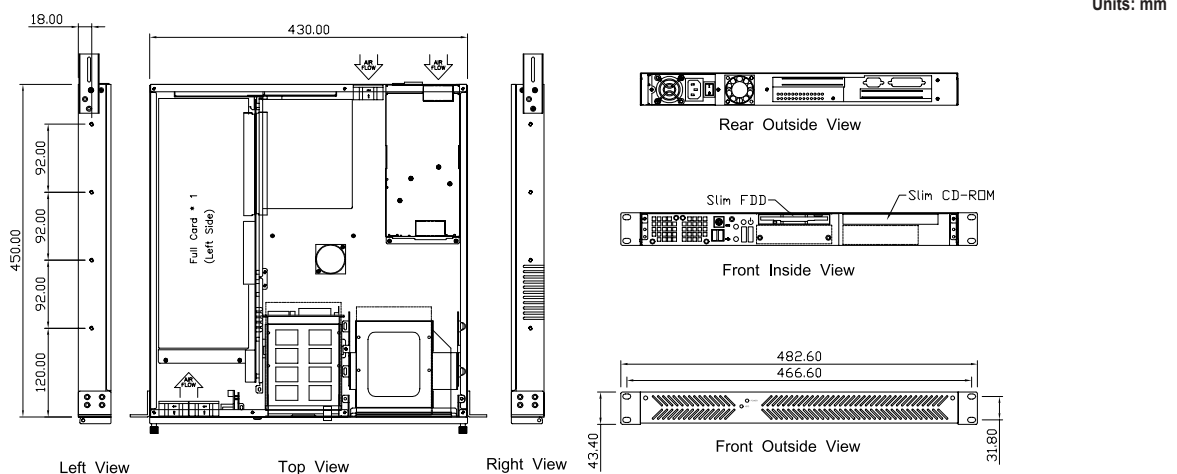

Specifications

Dimensions	19 x 1.75 x 17.7 inch (483 x 44 x 450 mm) (W x H x D)
Drive Bays	One 5.25" bay for slim type CD-ROM drive One 3.5" bay for slim type FDD Two internal 3.5" drive bays
Construction	Heavy-Duty Steel
Color Options	Black: standard Others: call for availability
Cooling Fans	Three 4 cm ball bearing fans, 7.0 CFM each, two front and one rear
Front Panel	Easy to customized front door LEDs: Disk activity, system power System reset switch, ATX power switch Two USB 1.1/2.0 connectors, PS2 keyboard connector
Rear Panel	Three I/O slots available
Carton Size	23.4 x 6 x 22.8 inch (59.4 x 15.2 x 57.8 mm)
Weight	12 kgs/26.4 lbs

- Advanced TCA Products
- 6U cPCI SBC
- 6U cPCI Platforms
- 3U cPCI SBC
- 3U cPCI Platforms
- SBC & IMB
- Industrial Chassis
- Computer On Modules
- Network Security Appliances
- Panel PC
- IPC Accessories