

RK-220

2U Rackmount Industrial Chassis with 6-slot Backplane



Features

- Four 5.25", two 3.5" & one slim CD-ROM external drive bay
- EIA RS-310C 19" rackmount standard
- Four 8 cm ball bearing fans, 42.5 CFM each

Ordering Information

Model Name	Color	Backplane	Power Supply
NS-220B-D6S4-400	Black	HPCI-D6S4	APS-940XA-ATX12
NS-220B-D5S4C-R460	Black	HPX-D5S4C	APS-946XAR

Backplane Options

Model Name	PICMG® CPU	PCI™	ISA	PCI-X™	PSU Connector
HPCI-D6S4	1	4	1	–	ATX/AT
HPX-D5S4C	1	2	0	2	ATX

Power Supply Options


Model Number	Watt	Input Range	Output (Max.)					Current Type	
			+5 V	+3.3 V	+12 V	-12 V	-5 V		+5 Vsb
APS-940XA-ATX12	400 W	90-264AC full Range	35 A	25 A	30 A	1 A	0.8 A	2 A	ATX12
APS-946XAR	460 W	90-264AC full Range	25 A	25 A	30 A	0.8 A	--	2 A	EPS12
APS-946XA-EPS12	460 W	90-264AC full Range	40 A	30 A	32 A	1 A	0.8 A	2 A	EPS12

Note: Contact us for more options such as DC input power supplies.

Specifications

Dimensions	17 x 3.5 x 25.6 inch (434 x 88.5 x 648.6 mm) (W x H x D)
Drive Bays	Four 5.25", two 3.5" & one slim CD-ROM external drive bay
Constructions	Heavy-Duty Steel
Color Option	Black: standard Others: call for availability
Cooling Fans	Four 8 cm ball bearing fans, 42.5 CFM each
Front Panel	LEDs: Disk active, system power System reset switch, ATX Power switch Two USB 1.1/2.0 connectors, PS2 keyboard connector
Rear Panel	Six I/O slots available
Carton Size	21.8 x 9.2 x 29.7 inch (555 x 235 x 755 mm)
Weight	16.5 kg/36.6 lbs

Dimensions

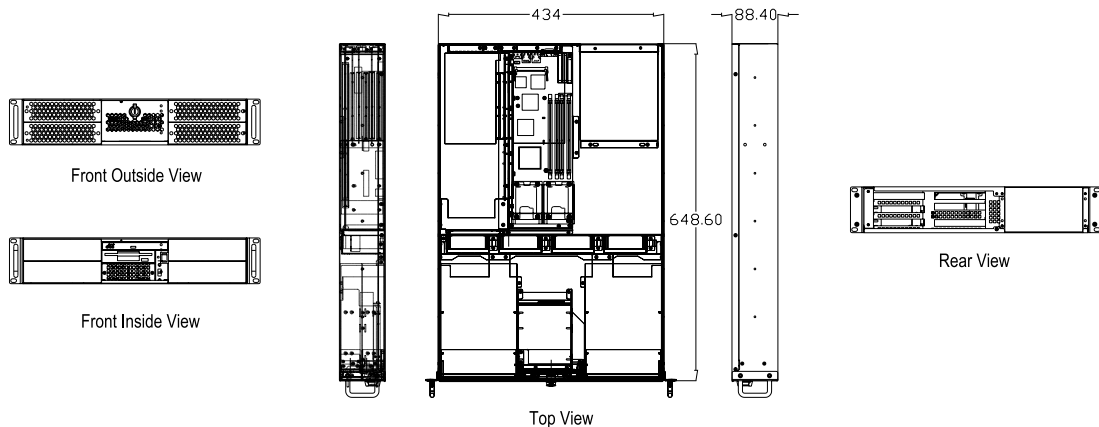

Units: mm

- 1 AdvancedTCA Products
- 2 6U cPCI SBC
- 3 6U cPCI Platforms
- 4 3U cPCI SBC
- 5 3U cPCI Platforms
- 6 SBC & IMB
- 7 Industrial Chassis
- 8 Computer On Modules
- 9 Network Security Appliances
- 10 Panel PC
- 11 IPC Accessories